



JENSEN Stump

Very compact and versatile

With its robust and compact design stands the equally impressive JENSEN stump grinders. A fully hydraulic machine on a hydraulically adjustable tracked machine is completely radio remote controlled.

The cutting area of the SCX50D is approx 360mm over and 400mm under the planum and the SCX70D is approx 300 mm over and 580mm under the planum. With a swing arc of 1.650mm the cutter wheels have the capacity to process large root stocks.

The unique Multi Tip cutter wheel system allows the JENSEN root stump grinders to achieve optimum cutting depth with even force distribution and guarantees simple and easy maintenance.

Technical Specifications

Technical details and illustrations reserved for further developments.

Engine (Diesel)	Hatz Silent 36,2 kW (50 hp)	Diesel Engine Tank Capacity	approx 60 L
Track Width Retracted approx	780 mm	Hydraulic Tank Capacity	approx 85 L
Track Width Extended approx	1.170 mm	Cutter Wheel Diameter	568 mm
Driving Speed	approx 4 km/h	Cutter Wheel Strength	20 mm
Length x Height	3.200 x 1.350 mm	Number of Cutting Teeth	8
Approx Weight	1.800 kg	Cutter Wheel Swing arc	1.650 mm
		Workdepth under Planum	400 mm
		Workdepth over Planum	360 mm



Grinders

Increased Performance

The combination of more cutting tips on a wheel whilst maintaining a good distance between the teeth, packs a punch that is unmatched by any other system.

Quick to change

An single bolt holds the tooth in place. This is undone and tightened with a simple hex key.

Cost Saving


The tooth takes nearly all the wear because all the other components are protected.

Strength

Forces are transferred directly into the wheel with very little bending or shearing action on any components.

Ease


Teeth can only be fitted one way, there is no special adjustment necessary. Ensuring perfect setup every time.



Cutter Wheel




Cutting Tooth

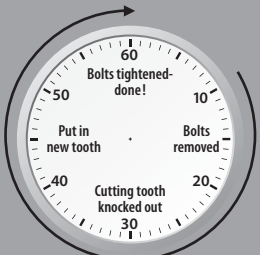

Changing the cutting tooth in 60 sec.



www.jensen-service.de

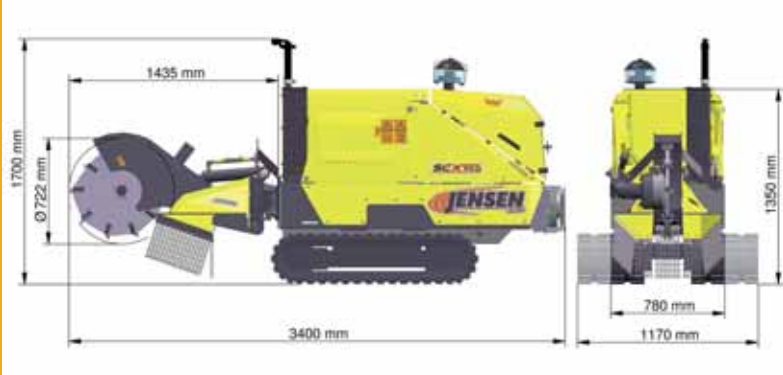

Technical Specifications

Technical details and illustrations reserved for further developments.

Engine (Diesel)	Hatz Silent 47,7 kW (64 hp)	Diesel Engine Tank Capacity	approx 60 L
Track Width Retracted approx	780 mm	Hydraulic Tank Capacity	approx 85 L
Track Width Extended approx	1.170 mm	Cutter Wheel Diameter	722 mm
Driving Speed	approx 4 km/h	Cutter Wheel Strength	20 mm
Length x Height	3.400 x 1.900 mm	Number of Cutting Teeth	10
Approx Weight	1.900 kg	Cutter Wheel Swing Width	1.650 mm
		Workdepth under Planum	580 mm
		Workdepth over Planum	300 mm

Your local dealer:

3rod ApS
Lillevang 16
3460 Birkerød
Danmark

Tel. [+45] 45 82 44 72
Mobil [+45] 40 30 44 52
www.3rod.dk

The logo for 3rod, featuring the number '3' in a large, bold, italicized font, followed by the word 'rod' in a similar font. Above the '3' is a stylized line drawing of a roof or a similar structure.

Our Commitments

We always endeavour to provide our customers an „All-round Carefree Package“.

We guarantee a decades long spare parts supply for our standard machines aswell as individual manufactured machines.

All machines are manufactured in our factory and sold by experienced and knowledgeable dealers and importers who provide professional advice and excellent service .

**You can also make the right decision
and choose**

